



Lenercom ESS-8k

Rated Power: 8kW

Battery Capacity: 15.36—46.08kWh



Security Protection

Voltage stabilization,
short circuit protection
of household applications



Safety protection

Stable voltage, home load short
circuit protection technology
Fault automatic repair



Intelligent Control

APP Remote Monitoring
Fault Automatic Repair

Technical Parameters



LC-E2-815T



LC-E2-820T



LC-E2-825T

Performance Specifications

Phase	Three-Phase
Rated Output Power	8000W
Max. Grid Output Apparent Power	8800VA
Rated Output Current	12.7A
Single Battery Capacity	5.12kWh
Max No. of Expandable Batteries	3~9
Usable Capacity Range	15.36~46.08kWh
Battery Type	LiFePO ₄
Battery Output Voltage	125V~600V
Grid Voltage Range	360V~440V
Rated Output Voltage	3W+N+PE 230V/400V
Rated Grid Frequency	50HZ/60HZ
Rated Grid Frequency	Auto Detect
PV Max Input Power	12000W
MPPT Voltage Range	180V~850V
System Charge & Discharge Efficiency	98.2%
Grounding Mode	TN
Switching Time	≤20ms
Designed Lifespan	10Years
Warranty *	5 years Product Warranty 10 years Performance Warranty

*Please observe our applicable warranty conditions.

* Under specific test conditions: 100% depth of discharge (DoD), 0.2C rate charge & discharge at 25°C.

Compatible Parameter


Certifications	CE/TUV
Safety Regulations	IEC 62109-1&-2, IEC 62477,MSDS EN 61000, UN38.3
Grid Regulations	G99/1-6:2020; EN50549-1:2019/AC:2019; EN50549-1:2019 RFG:2016; VDE-AR-N 4105:2018; EN62116;EN61727;EN61683

* We reserve the right to make technical changes. The values, outputs, other technical data, images, and diagrams in this prospectus and in data sheets, advertisements, and other promotional documents are approximate guidelines in all cases where they have not been identified as binding.

Mechanical Specifications *

Inverter Dimensions/Weight	600/420/820mm/65.5kg
Battery Dimensions/Weight	600/420/200mm/54kg
Base Dimensions/Weight	600/420/130mm/17.5kg
Mounting Options	Stacking

* The dimension of the product shall be subject to the real object, with a tolerance of ±3%.

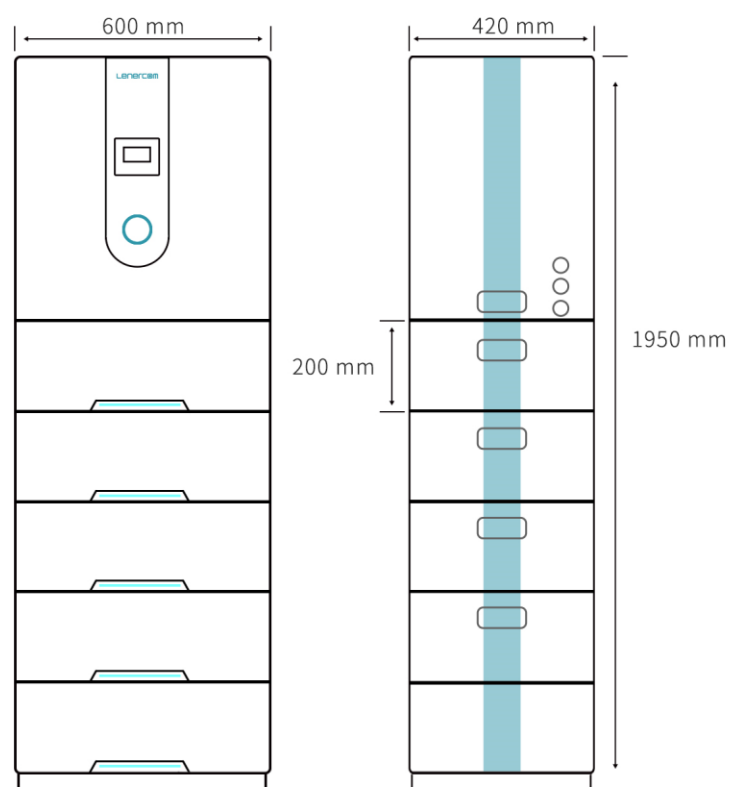

*The dimension of the above picture corresponds to the product model: LC-E2-825T.

Environmental Specifications

Operating Temperature *	-15°C~55°C
Recommend Temperature	25°C
Altitude	2000M
Humidity	5~95%Without Condensation
Ingress Rating	IP20

* When the temperature is below 0°C or above 40°C, the performance will be limited.

Lenercom

Lenercom ESS-8K

Hunan Lenercom Technology Co., Ltd.

+86 0731-88051567 +86 181 0841 3339 <https://www.lenercom.com>

Floor 12, building B1, Lugu science and technology innovation and entrepreneurship Park, Changsha City, Hunan Province



WATCH THE VIDEO